


PF400S STANDARD MODEL

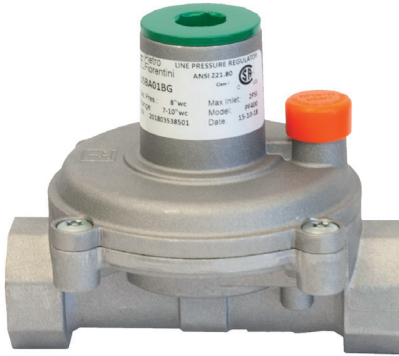

2 PSIG

MAIN FEATURES

- ANSI Z21.80A-2012 / CSA 6.22A-2012 (R2016) Class I for outlet pressures up to 14" W.C. certified
- ANSI Z21.18B-2012 / CSA 6.3B-2012 (R2017) for inlet pressure up to 5 PSIG certified
- External Vent Limiter – no vent line required**
- Positive 100% bubble tight lockup
- Filter included in all models

SPECIFICATIONS

- Suitable for use with Natural Gas, LPG, and other non-corrosive, clean gas
- Max. Inlet Pressure:
CSA rated - 2 PSIG
Pietro Fiorentini rated -10 PSIG
- Outlet Pressure: 2.5" W.C. to 14" W.C.
- Temperature Range: -40°F to 150°F
- Connections: 3/8" and 1/2"
- Maximum Emergency Inlet Exposure Pressure: 65 PSIG
- Suitable for Indoor or Outdoor Installation***

VENT SIZE

- 1/8" NPT

OUTLET SPRING RANGE

- Red 2.5" W.C. to 7" W.C.*
- Black 7" W.C. to 10" W.C.*
- Yellow 10" W.C. to 14" W.C.*
- Violet 1.65 PSIG to 2 PSIG

*Spring is CSA outlet pressure certified

**As Approved by Local Codes and Standards

***Brass vent limiter must be removed for outdoor installation

CAPACITY FOR MULTI-APPLIANCE SERVICE (SCF/H)

| Outlet Pressure Set Point | | Operating Inlet Pressure | | | | | |
|---------------------------|-----------|--------------------------|----------|--------|------------|--------|---------|
| | | 1/2 PSIG | 3/4 PSIG | 1 PSIG | 1 1/2 PSIG | 2 PSIG | 10 PSIG |
| PF400 1/2" | 2.5" W.C. | 160 | 225 | 300 | 350 | 400 | 400 |
| | 7" W.C. | 145 | 200 | 275 | 350 | 400 | 400 |
| | 10" W.C. | 110 | 200 | 275 | 350 | 400 | 400 |
| | 14" W.C. | / | 175 | 250 | 325 | 400 | 400 |
| PF400 3/8" | 2.5" W.C. | 160 | 180 | 200 | 225 | 250 | 250 |
| | 7" W.C. | 145 | 180 | 200 | 225 | 250 | 250 |
| | 10" W.C. | 110 | 180 | 250 | 275 | 300 | 300 |
| | 14" W.C. | / | 160 | 200 | 250 | 300 | 300 |

Tab.1

Actual stated recommended capacities for optimal performance.


For additional sizing, visit www.gasinside.com

888.618.8787

Single appliance max capacity 140 SCF/H. The flow rate is the same, with or without the filter.

PF400D DUAL CUT MODEL

10^{PSIG}

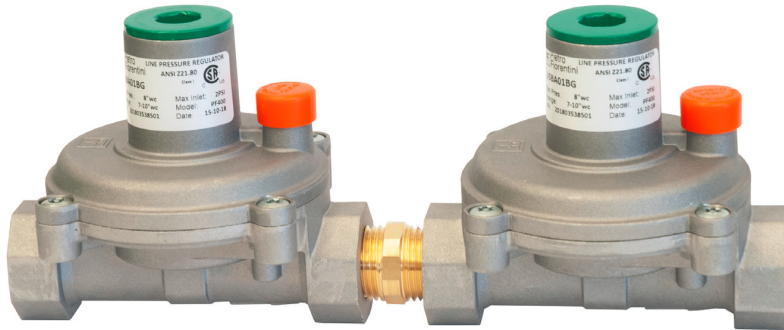

MAIN FEATURES

- 2 stage out for added safety
- ANSI Z21.80A-2012 / CSA 6.22A-2012 (R2016) Class I for outlet pressures up to 14" W.C. and inlet pressure up to 10 PSIG Certified
- External Vent Limiter – no vent line required**
- Positive 100% bubble tight lockup
- Filter included in all models

SPECIFICATIONS

- Suitable for use with Natural Gas, LPG, and other non-corrosive, clean gas
- Max. Inlet Pressure:
CSA rated - 2 PSIG
Pietro Fiorentini rated -10 PSIG
- Outlet Pressure: 2.5" W.C. to 14" W.C.
- Temperature Range: -40°F to 150°F
- Connections: 3/8" and 1/2"
- Maximum Emergency Inlet Exposure Pressure: 65 PSIG
- Suitable for Indoor or Outdoor Installation***

VENT SIZE

- 1/8" NPT

OUTLET SPRING RANGE

- Red 2.5" W.C. to 7" W.C.*
- Black 7" W.C. to 10" W.C.*
- Yellow 10" W.C. to 14" W.C.*
- Violet 1.65 PSIG to 2 PSIG

*Spring is CSA outlet pressure certified

**As Approved by Local Codes and Standards

***Brass vent limiter must be removed for outdoor installation

CAPACITY FOR MULTI-APPLIANCE SERVICE (SCF/H)

| Outlet Pressure Set Point | | Operating Inlet Pressure | | |
|---------------------------|-----------|--------------------------|--------|---------|
| | | 2 PSIG | 5 PSIG | 10 PSIG |
| PF400 1/2" | 2.5" W.C. | 400 | 400 | 400 |
| | 7" W.C. | 400 | 400 | 400 |
| | 10" W.C. | 400 | 400 | 400 |
| | 14" W.C. | 400 | 400 | 400 |
| PF400 3/8" | 2.5" W.C. | 200 | 250 | 250 |
| | 7" W.C. | 250 | 250 | 250 |
| | 10" W.C. | 300 | 300 | 300 |
| | 14" W.C. | 300 | 300 | 300 |

Tab.2

Single appliance max capacity 140 SCF/H. The flow rate is the same with or without filter.

Actual stated recommended capacities for optimal performance.

For additional sizing, visit
www.gasinside.com

888.618.8787