


FT 518

FT 518 is a **lever-operated** regulator controlled by a diaphragm and setting spring which controls the valve. It is mainly used for farm tap applications, high-pressure transmission systems and for medium pressure natural gas distribution networks with previously filtered non-corrosive gases. According to the European Standard, it is classified as **Fail Open**.



Medium / small industries

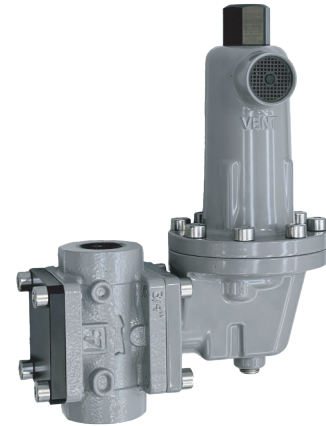

District stations

Features	Values
Design pressure* (PS ¹ / DP ²)	up to 6.94 MPa up to 1000 psig
Ambient temperature* (TS ¹)	from -40 °C to +60 °C from -40 °F to +140 °F
Inlet gas temperature*	from -20 °C to +60 °C from -4 °F to +140 °F
Inlet pressure (MAOP / p _{umax} ¹)	from 0.14 to 6.94 MPa from 20 to 1000 psig
Range of downstream pressure (Wd ¹)	from 0.034 to 3.4 MPa from 5 to 500 psig
Available accessories	Token IRV, built-in strainer, incorporated monitor, incorporated slam-shut
Minimum operating differential pressure (Δp _{min} ¹)	49 kPa 7 psig
Accuracy class (AC ¹)	up to 20 (depending on working conditions)
Lock-up pressure class (SG ¹)	up to 20 (depending on working conditions)
Nominal size (DN ^{1,2})	DN 20 3/4"; DN 25 1"; DN 50 2"
Orifice	3/32"; 1/8"; 3/16"; 1/4"; 3/8"; 1/2"
Connections	threaded NPT, flanged or SW (available soon)

(¹) according to EN334 standard

(²) according to ISO 23555-1 standard

(*) NOTE: Different functional features and/or extended temperature ranges may be available on request. Stated inlet gas temperature range is the maximum for which the equipment's full performance, including accuracy is guaranteed. Product may have a different pressure or temperature ranges according to the version and/or installed accessories.

Table 1 Features

Materials and Approvals

Part	Material
Body	Ductile iron GS400-18 equivalent to ASTM 536 60-40-18
Cover	Die cast aluminum
Valve	Nitrile rubber / High performance compound
Seat	Brass
Diaphragm	Nitrile rubber
Sealing ring	Nitrile rubber
Stem	Stainless steel

NOTE: The materials indicated above refer to the standard models. Different materials can be provided according to specific needs.

Table 2 Materials

The **FT 518** regulator, is designed according to the ANSI B 109.4 standard where applicable. The regulator reacts in opening (Fail Open) according to EN 334 classification. Leakage class: bubble tight, better than class VIII according to ANSI/FCI 70-3.



ANSI B109.4

FT 518 competitive advantages



Compact and simple design



Top entry



Operates with high differential pressure



Built-in accessories



Built-in filter



Easy maintenance



Token IRV



Biomethane compatible and available with specific versions for full Hydrogen or blending